Caracteristici



- Innovative concept of decorative air curtain based on a recessed model to be installed free-hanging.
- Panou lateral fin, care poate fi personalizat cu logotipuri, lumini, litere sau alte informa□ii informative sau de avertizare, în func□ie de cerin□ele clien□ilor.
- Self-supporting casing construction made of galvanized steel plate painted in grey RAL9006. Alte culori sunt disponibile la cerere.
- Inlet and Outlet inbuilt in the same grid painted in white RAL9016. Alte culori sunt disponibile la cerere.
- Palete de evacuare din aluminiu anodizat, cu formă aerodinamică.
- Ventilatoare transversale silen□ioase, alimentate de un motor extern cu rotor □i 2 viteze.
- "P" type with water heated coil and integrated regulation for ON/OFF or three stages 0-10V proportional valve. Tip "E" cu componente protejate electric, trei stadii cu ajustare integrată.Tip "A" fără încălzire, doar aer.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.

Specifica□ii

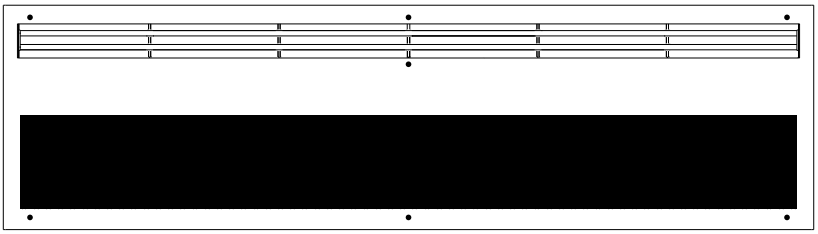
50Hz


Model	(m³/h)	(m)
TOP 1000 A	3.5	
TOP 1500 A	3.5	
TOP 2000 A	3.5	

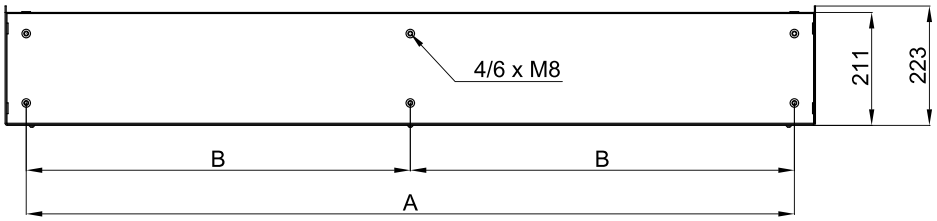
Model	(m³/h)	(kW)	(m)
TOP 1000 E	3.5		
TOP 1500 E	3.5		
TOP 2000 E	3.5		

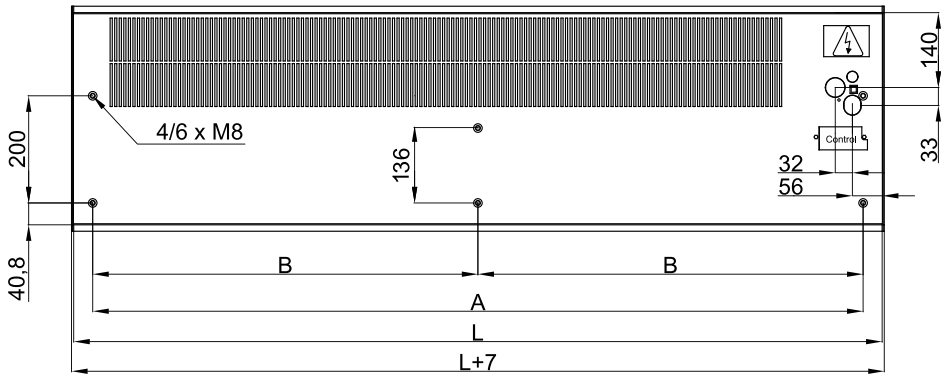
Model	(m³/h)	(kW)	(m)
TOP 1000 P86	3.5		
TOP 1500 P86	3.5		
TOP 2000 P86	3.5		
TOP 1000 P64	3.5		
TOP 1500 P64	3.5		
TOP 2000 P64	3.5		

Dimensiuni




420


4/6 x M8
211
223
B
B
A


4/6 x M8
200
136
140
33
32
56
Control
40,8
B
B
A
L
L+7